

# Double Sided Foam Tape

## DSFT & DSFT18 Series

### RoHS & REACH Compliant

Double Sided Foam Tapes are made of a closed-cell, cross linked polyethylene foam, coated on both sides with a glassine liner. They are available in 1/16" and 1/8" thick material. They conform to most solid smooth surfaces and the solvent based acrylic adhesive is well suited for outdoor and long-term applications.


### Applications

- Aerospace and Automotive
- Construction and General Repair
- Glass Industries

### Product Specifications <sup>(1)</sup>

Color	White
Adhesion Type	Solvent Acrylic
Material Thickness	1/16" (DSFT) & 1/8" (DSFT18)
Adhesive Thickness	2.4 mil
Foam Density	4 lbs./ft. <sup>3</sup>
Liner	PE coated white paper liner
Adhesion	≥ 72 oz./in.
Elongation	300% (DSFT) & 250% (DSFT18)
Cohesion	≥ 2,880 minute, 73 °F
Storage Temperature	Under 23 °C (73 °F) and 50 % relative humidity
Length	36 Yards (DSFT) & 18 Yards (DSFT18)
UNSPSC Code	31201503

<sup>(1)</sup> Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

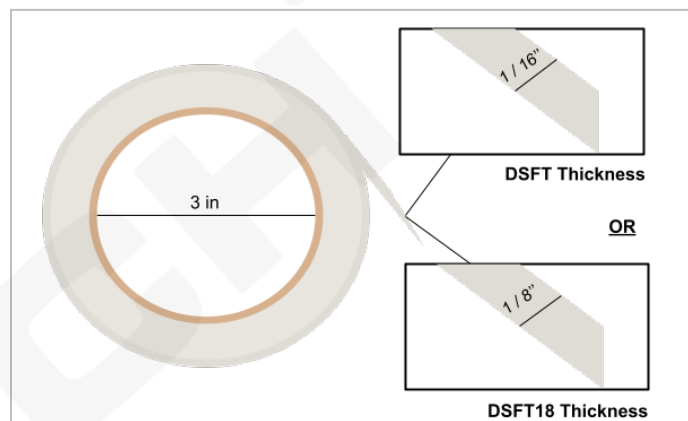

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



**Bertech**  
640 Maple Ave  
Torrance, CA 90503  
Phone: (310) 787-0337  
Email: [sales@bertech.com](mailto:sales@bertech.com)  
[www.bertech.com](http://www.bertech.com)

**PRODUCT DATA SHEET**