

ESD Clear Tape

ESDCT3C Series

RoHS & REACH Compliant

ESD Tapes are made from 2 mil clear cellulose material. They are coated with a solvent based natural rubber adhesive, which provides excellent tack and holding power. These tapes are available on a 3" core and are 72 yards long. They are available as clear tape as well as cellulose tape with an ESD symbol printed on it.


Applications

- General packaging in environments where static charge is an issue
- Computer Technicians and Electronic Assembly
- Fiber Optics Manufacturing, Hospitals, and Solar Industries

Product Specifications ⁽¹⁾

Color	Clear	
Adhesion Type	Rubber	
Grid Material	Cellulose Cellophane Film	
Total Thickness	2 Mil	
Tensile Strength	25 lbs./in	
Elongation	18%	
Static Generation	< 250 volts @ 50% RH	
Operating Temperature	66°C (151°F)	
Adhesion to Steel	66 Oz./in	
Static Decay	<0.014 Seconds	
Length	72 Yards	
Core	3 in. Plastic Core	

(1) Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

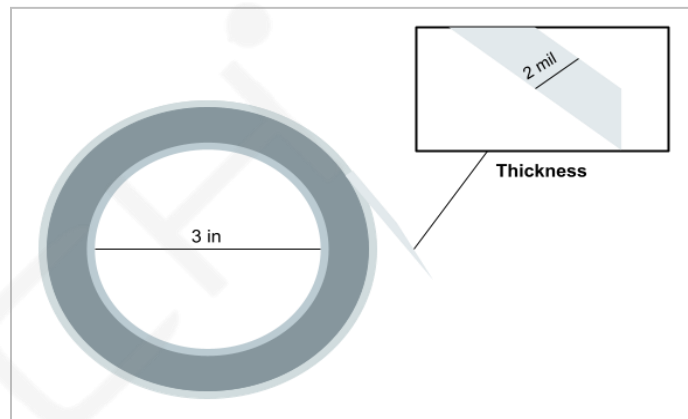

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



Bertech
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@bertech.com
www.bertech.com

PRODUCT DATA SHEET