

ESD Soldering Mats & Mat Kits

2059S Series

RoHS & REACH Compliant

ESD Soldering Mats consist of a top layer static dissipative rubber laminated to a bottom layer of conductive rubber. The synthetic rubber work surface offers excellent resistance to oil, grease, and most common solvents. They are heat and solder resistant, will not delaminate and are easy to clean. Static dissipative synthetic rubber laminated to a bottom layer of conductive rubber.


Applications

- Computer Operators and Electronic Assembly
- Pharmaceutical Plants and Cleanroom Operation
- Fiber Optics, Aerospace, and Hospitals

Product Specifications ⁽¹⁾

COLOR	Blue, Green	
EMBOSS PATTERN	Matte finish, Non-Embossed	
GAUGE /THICKNESS	0.080" ± 10%; 5/64"	
TENSILE STRENGTH	> 1000 psi	
ELONGATION	300% minimum	
HARDNESS	60 ± 5, Shore A	
ESD PROPERTIES: R _{TT}	2 × 10 ⁶⁻⁸ ohms	
ESD PROPERTIES: R _{TG}	8 × 10 ⁶⁻⁸ ohms	
CHARGE DECAY TIME: 5KV TO 50V	0.01 Seconds	
TEMPERATURE	190°F	
UNSPSC CODE	46182105	

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

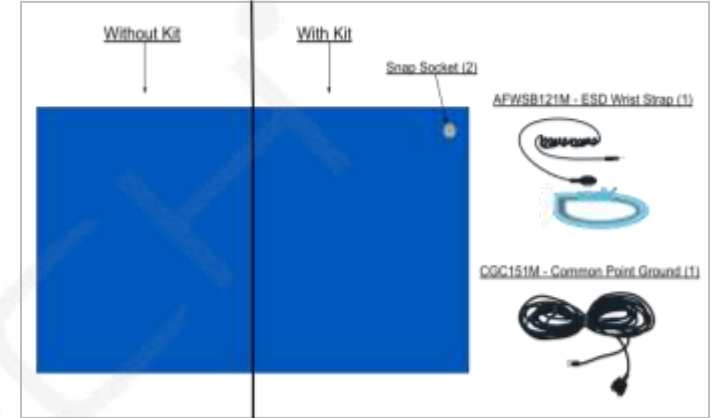

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



Bertech
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@bertech.com
www.bertech.com

PRODUCT DATA SHEET