

1 Mil Masking Tape with Acrylic Adhesive

BLTA1 and YPTA1 Series

RoHS & REACH Compliant

Masking Tape with Acrylic Adhesive are made of 1 mil thick polyester film and 1.5 mil thick acrylic adhesive. They are designed to masking during powder coating and splicing operations. They can be removed cleanly without leaving any residue. These tapes are packaged on a 3" core and are 72 yards long.


Applications

- Electronic Circuit Board Assembly
- Powder Coating of Switches and Control Panels
- Conformal Coating Process and Wave Soldering

Product Specifications ⁽¹⁾

Color	Black, Yellow	
Adhesion Type	Acrylic	
Film Thickness	1 Mil	ASTM D-3652
Adhesive Thickness	1.5 Mil	
Total Thickness	2.5 Mil	ASTM D-3652
Tensile Strength	25 lbs./in	ASTM D-3759
Elongation	100 %	ASTM D-3759
Dielectric Strength	4,200 volts	ASTM D-149
Operating Temperature	-29°C (-20.2°F) to 150°C (302°F)	
Length	72 Yards	
Adhesion to Steel	35 Oz./in	ASTM D-3330
Core	3 in. Plastic Core	

⁽¹⁾ Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

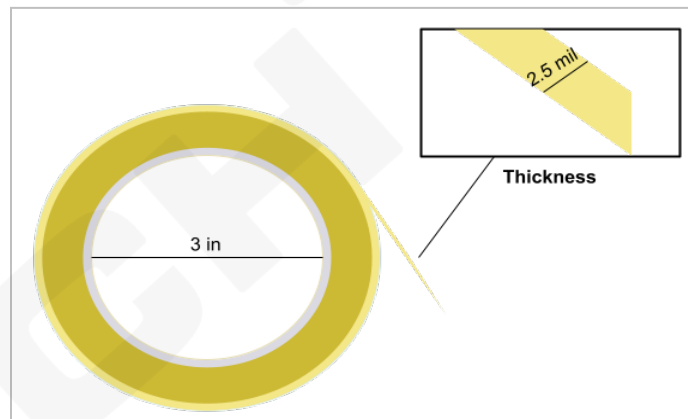

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



Bertech
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@bertech.com
www.bertech.com

PRODUCT DATA SHEET