

ComforTred Floor Mat

CFTX134 Series

RoHS & REACH Compliant

ComforTred Floor Mats are designed with a cross-linked vinyl-nitrile construction, making it 2 to 3 times more resilient than ordinary vinyl sponge matting. It combines the durability of vinyl and nitrile rubber with a slip resistant top for safety in the workplace. This floor mat has moisture and stain resistant properties that cuts the cleaning and maintenance time. ComforTred Floor Mats are 3/4" thick.

Applications


- Auto and Electronic
- Industrial Warehouse and Customer Service Counters
- Retail Checkout, Hotel Counters, and Retail Counters

Product Specifications ⁽¹⁾

COLOR	Black	
EMBOSS PATTERN	Textured	
DENSITY	20 lb./ft ³ nominal	
THICKNESS	3/4"	
TENSILE	100 lbs./in. ²	ASTM D412, Die C
ELONGATION	125%	ASTM D412, Die C
TEAR	20 lbs./in.	ASTM D624, Die C
DUROMETER	65 ± 5 Shore OO	ASTM D2240
Suggested Service Temperature	−20 °F to +200 °F ⁽²⁾	

(1) Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

(2) This suggested range represents the general temperature range for most flexible vinyl products

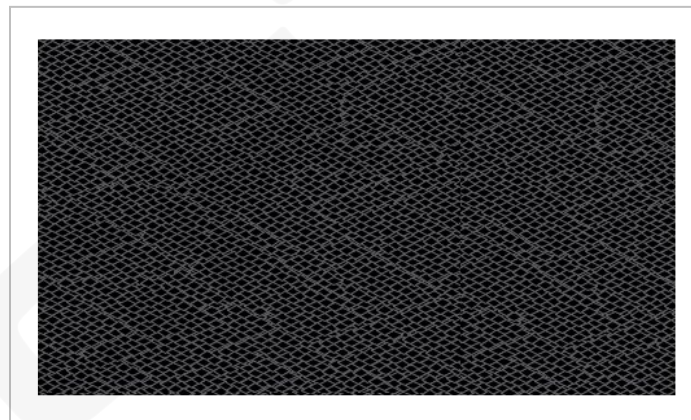

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



Bertech
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@bertech.com
www.bertech.com

PRODUCT DATA SHEET