

5 Mil Green Polyester Masking Tape

GPT5 Series - UL Recognized

RoHS & REACH Compliant

Green Masking Tapes are made of 5 mil thick polyester film and 1.5 mil thick silicone adhesive with a primer in between. They are designed to masking during powder coating and splicing operations. They can be removed cleanly without leaving any residue. These tapes are packaged on a 3" core and are 36 yards long.


Applications

- Electronic Circuit Board Assembly
- Powder Coating of Switches and Control Panels
- Conformal Coating Process and Wave Soldering

Product Specifications ⁽¹⁾

| | | |
|-----------------------|---------------------------------|-------------|
| Color | Green | |
| Adhesion Type | Silicone | |
| Film Thickness | 5 Mil | ASTM D-3652 |
| Adhesive Thickness | 1.5 Mil | |
| Total Thickness | 6.5 Mil | ASTM D-3652 |
| Tensile Strength | 98 lbs./in | ASTM D-3759 |
| Elongation | 100 % | ASTM D-3759 |
| Dielectric Strength | 10,000 volts | ASTM D-149 |
| Operating Temperature | -73°C (-100°F) to 200°C (392°F) | |
| Length | 36 Yards | |
| Adhesion to Steel | 30 Oz./in | ASTM D-3330 |
| Core | 3 in. Plastic Core | |

(1) Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

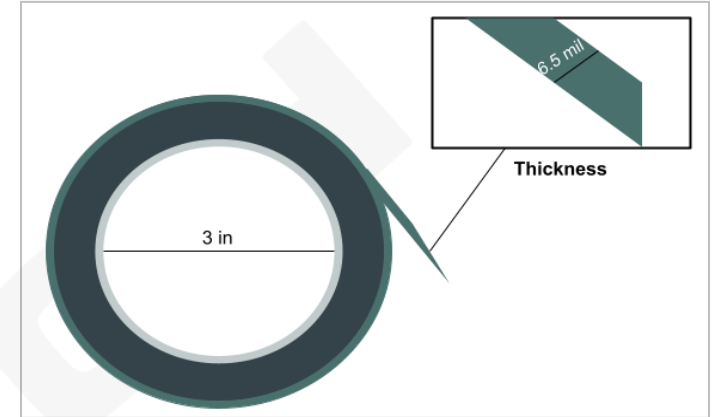

UL Recognized: UL510A Standard, Category OANZ2, File No. E540428

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



Bertech
640 Maple Ave
Torrance, CA 90503
Phone: (310) 787-0337
Email: sales@bertech.com
www.bertech.com

PRODUCT DATA SHEET