



**EOS/ESD Association Services, LLC**

# Product Test Report

Bertech ESD Worksurface Mats  
Model: 2059T Series

Testing per:  
ANSI/ESD STM4.1-2017

Technician - Brennan Pimpinella

*The results provided in this report are accurate within the limits appropriate to each test standard. This report shall not be reproduced, except in full, without written permission from EOS/ESD Association Services, LLC.*

Bertech worksurface samples were tested as provided. The samples only had one groundable point. The surface resistance point to groundable point (RtG) and point-to-point (Rtt) were tested according to ANSI/ESD STM 4.1.

Test Date: 2/06/26

Test Facility: EOS/ESD Association Services LLC

Conditioning Temperature: 23°C

Conditioning Humidity: 12% R.H.

Conditioning Time: 48 hours

Test Temperature: 23°C

Test Humidity: 10%R.H.



Operator: Brennan Pimpinella




Equipment: PRS-801B Resistance System

### Equipment Verification

Upper Resistance	Electrification period in seconds	Test Voltage
1.38E+14	20	100

### Schematic of test points

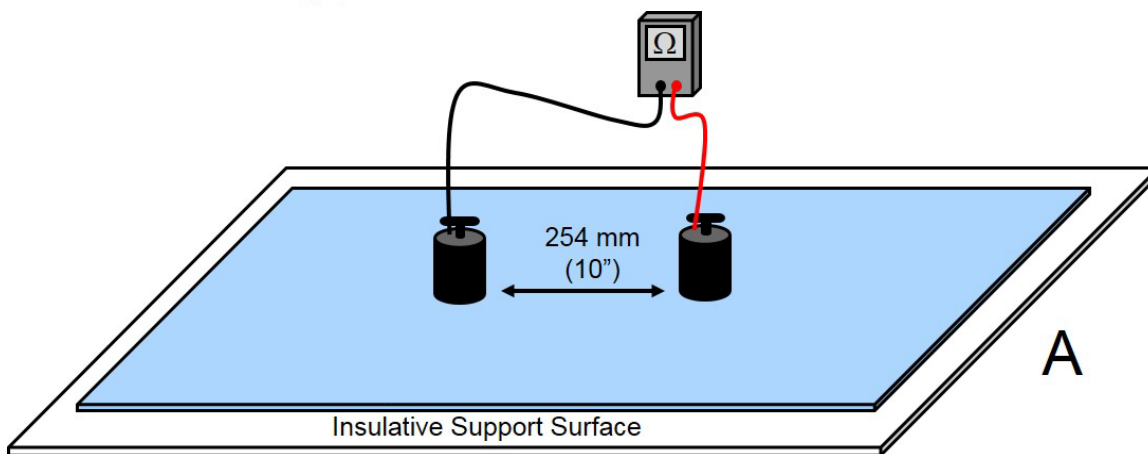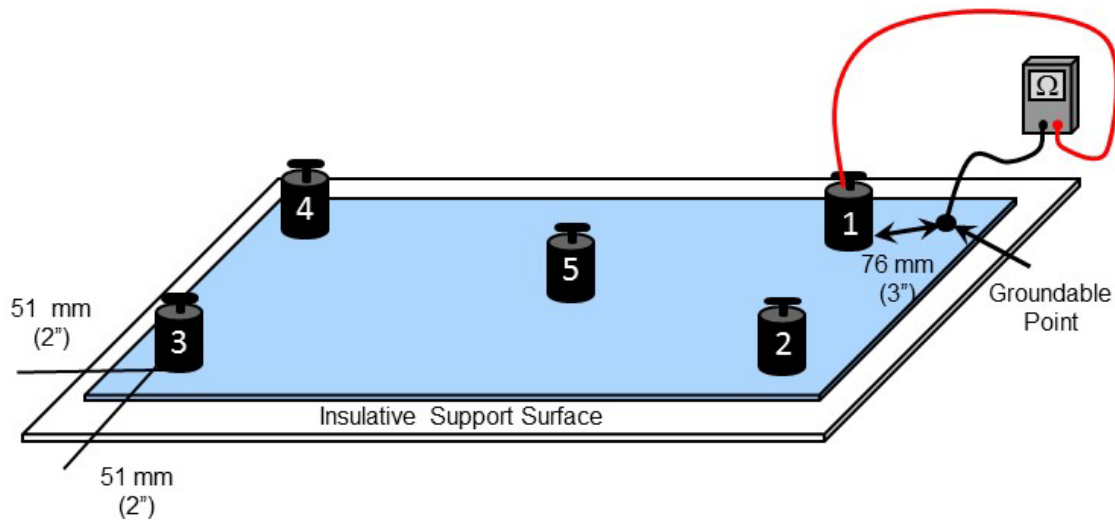

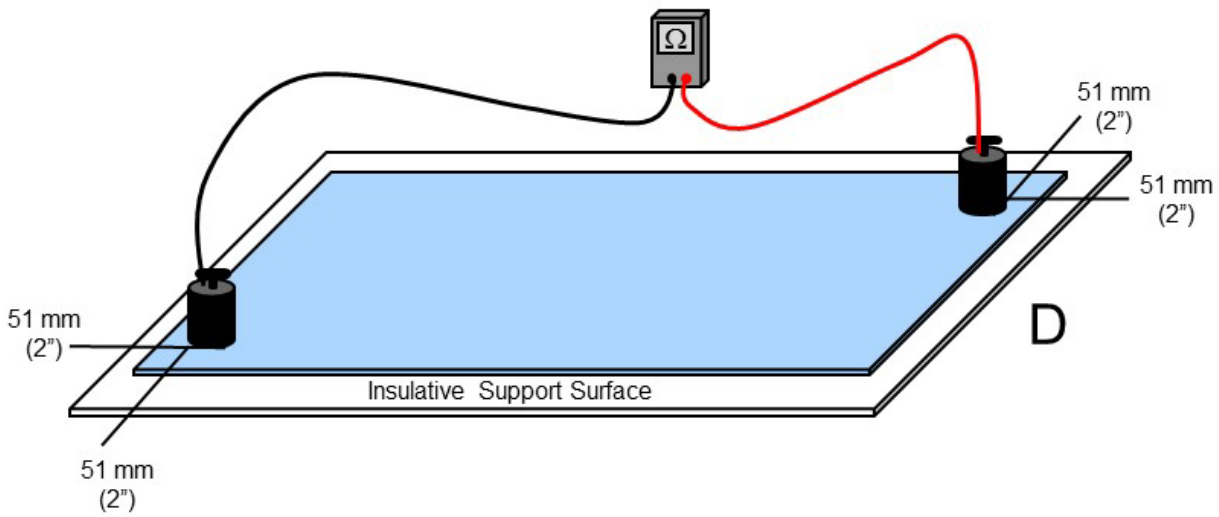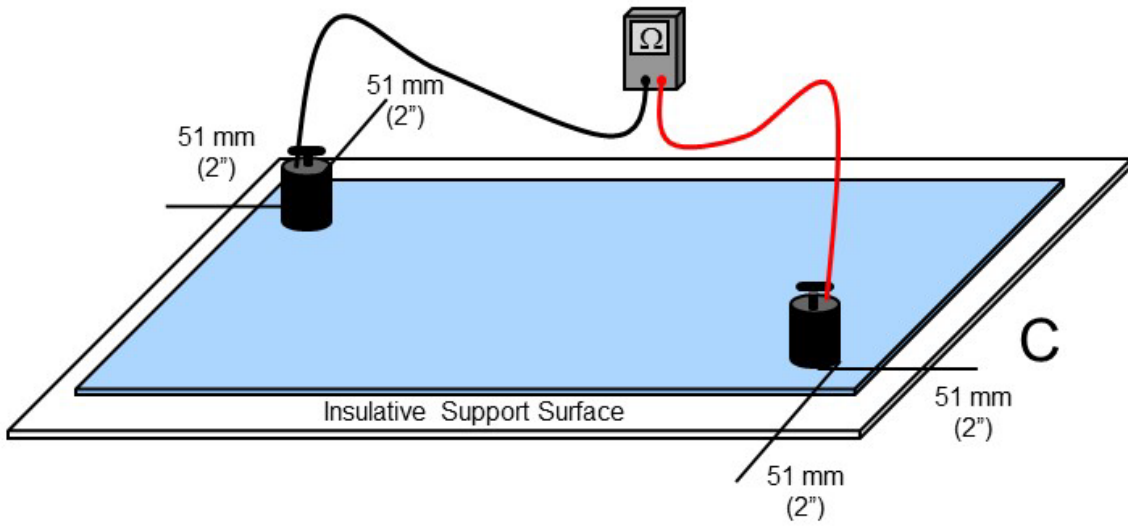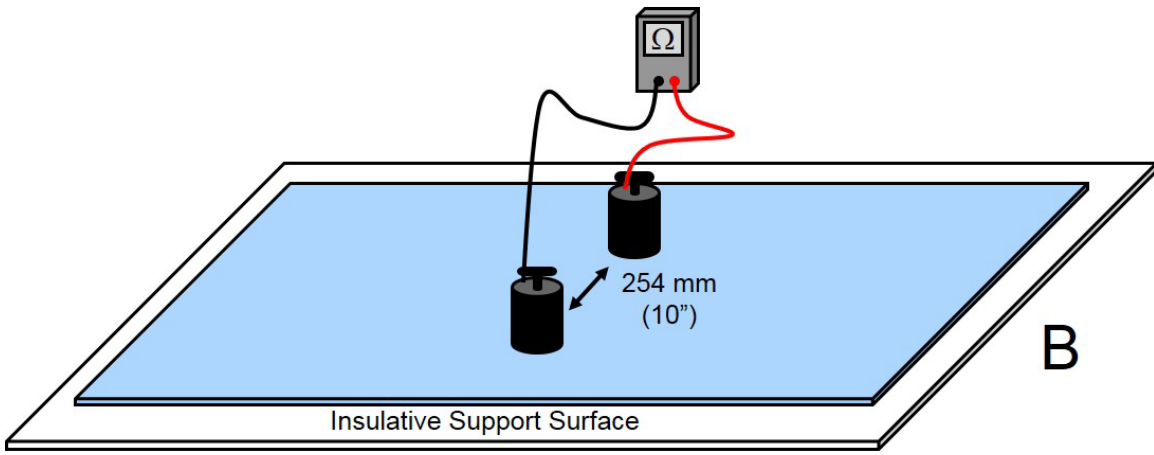

### Model 2059T Sample 1

Resistance to Groundable point	Resistance
	3.56E+07
	3.49E+07
	3.50E+07
	3.67E+07
	3.16E+07
Summary	
Minimum	3.16E+07
Maximum	3.67E+07
Mean	3.48e+7

Resistance Point point	Resistance
	7.88E+07
	9.15E+07
	8.59E+07
	7.59E+07
Summary	
Minimum	7.59E+07
Maximum	9.15E+07
Mean	8.30E+07

### Model 2059T Sample 2

Resistance to Groundable point	Resistance
	2.99E+07
	3.87E+07
	3.05E+07
	3.18E+07
	2.18E+07
Summary	
Minimum	2.18E+07
Maximum	3.87E+07
Mean	3.05E+07

Resistance Point point	Resistance
	5.98E+07
	4.77E+07
	7.13E+07
	7.29E+07
Summary	
Minimum	4.77E+07
Maximum	7.29E+07
Mean	6.29E+07

### Model 2059T Sample 3

Resistance to Groundable point	Resistance
	2.78E+07
	3.60E+07
	2.23E+07
	2.13E+07
	2.16E+07
Summary	
Minimum	2.13E+07
Maximum	3.60E+07
Mean	2.58E+07

Resistance Point point	Resistance
	5.24E+07
	5.02E+07
	6.02E+07
	6.69E+07
Summary	
Minimum	5.02E+07
Maximum	6.69E+07
Mean	5.74E+07

The limit in ANSI/ESD S20.20 – 2021 or IEC 61340-5-1 Ed 3 is less than  $1 \times 10^9$  ohms. According to the Min and Max Resistance of each sample, Model 2059T, meet the requirements of ANSI/ESD S20.20-2021

*The results provided in this report are accurate within the limits appropriate to each test standard. This report shall not be reproduced, except in full, without written permission from EOS/ESD Association Services, LLC.*

02/06/2026

EOS/ESD Association Services, LLC  
 218 W. Court Street  
 Rome, NY 13440

*Submitted to Client by:*



Lisa Pimpinella  
 Executive Director