

# ESD Anti-Static Polyimide Discs

## PPDLS Series

### RoHS & REACH Compliant

ESD Anti-Static Polyimide Discs are made of 1 mil thick polyimide film backed by 1.5 mil silicone adhesive with electro-static dissipative (ESD) properties to reduce the static charge. The silicone adhesive leaves no residue. Total thickness of this product is 2.5 Mil. They can withstand temperatures of up to 260 degrees C (500 degrees F).


## Applications

- 3D Printing and Aerospace Assembly
- Automotive Facilities and Electronic Assembly
- Fiber Optics Manufacturing and Solar Panels

## Product Specifications <sup>(1)</sup>

Color	Amber	
Adhesion Type	Silicone	
Film	1 Mil	ASTM D-3652
Adhesive Thickness	1.5 Mil	
Total Thickness	2.5 Mil	ASTM D-3652
Adhesion to steel	26 oz./in	ASTM D-3330
Tensile Strength	30 lbs./in	ASTM D-3759
Elongation	70 %	ASTM D-3759
Dielectric Strength	6,000 volts	ASTM D-149
Operating Temperature	260°C (500°F)	

(1) Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

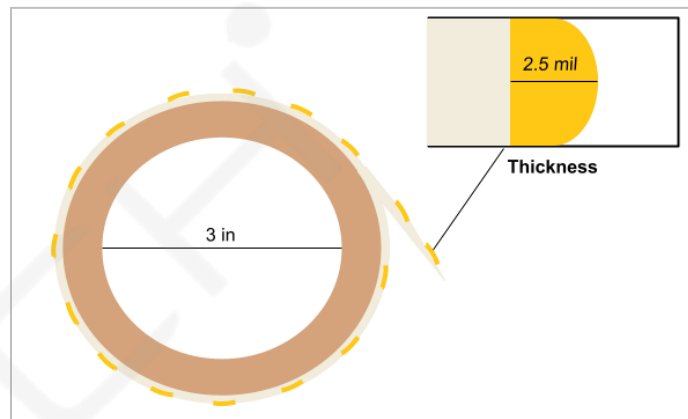

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



**Bertech**  
640 Maple Ave  
Torrance, CA 90503  
Phone: (310) 787-0337  
Email: [sales@bertech.com](mailto:sales@bertech.com)  
[www.bertech.com](http://www.bertech.com)

**PRODUCT DATA SHEET**